

ISSUE 1; September 2016

Description

- The IQXO-944 is a very high performance device delivering ultra low RMS phase jitter for high speed serial data applications in telecom, networking and communication equipment.
- Applications:
 - Base stations
 - Ethernet
 - DSL/ADSL
 - WiMAX/W-LAN
 - Communications
 - Wi-Fi
 - Consumer
- Features:
 - Ultra Low Jitter 0.05 to 0.3 ps integrated 12kHz to 20MHz
 - Excellent temperature stability
 - CMOS, LVPECL, LVDS, or HCSL output options
 - Wide frequency range

Frequency Parameters

- Frequency 1.0MHz to 640.0MHz
- Frequency Stability $\pm 10.00\text{ppm}$ to $\pm 20.00\text{ppm}$
- Frequency Stability (including tolerance, temperature range, supply voltage variation, load variation and 10 years ageing at 25°C)


Electrical Parameters

- Supply Voltage Options:
 - 2.5V $\pm 5\%$
 - 3.3V $\pm 10\%$
- Supply Current:
 - CMOS 1 to 40mA
 - LVPECL 40 to 120mA
 - LVDS 30 to 80mA


Operating Temperature Ranges

- -40 to 85°C

Outline (mm) 1.5mm package height




- Pad Connections
1. Enable/Disable or NC
 2. Enable/Disable or NC
 3. GND
 4. Output (CMOS)
 5. Output (LVPECL/LVDS) or NC
 6. +Vs




Underside View


Solder Pad Layout



Outline (mm) 1.6mm package height




- Pad Connections
1. Enable/Disable or NC
 2. Enable/Disable or NC
 3. GND
 4. Output (CMOS)
 5. Output (LVPECL/LVDS) or NC
 6. +Vs




Underside View


Solder Pad Layout



Outline (mm) = 1.75mm package height




- Pad Connections
1. Enable/Disable or NC
 2. Enable/Disable or NC
 3. GND
 4. Output (CMOS)
 5. Output (LVPECL/LVDS) or NC
 6. +Vs



Underside View

Solder Pad Layout



Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com

Output Details

- Output Compatibility CMOS/LVPECL/LVDS
- Output Characteristics (CMOS up to 200MHz):
Load: 15pF
Output Low (Vol): 10%Vs max
Output High (Voh): 90%Vs min
Duty Cycle @ 50% Vs: 45/55% max
R/F Time (@ 90%/10%): 3ns max
Phase Jitter (12kHz-20MHz): 0.05 to 0.3ps rms max
- Output Characteristics (LVPECL):
Load: 50Ω
Output Low (Vol): Vs-1.6V max
Output High (Voh): Vs-1.03V min
Duty Cycle (@ Vs-1.3V): 45/55% max
R/F Time (@ 80%/20%): 0.6ns max
Phase Jitter (12kHz-20MHz): 0.05 to 0.3ps rms max
- Output Characteristics (LVDS):
Load: 100Ω
Differential Output Voltage: 350mV
Duty Cycle (@ 1.25V): 45/55%
R/F Time: 0.6ns max
Phase Jitter (12kHz-20MHz): 0.05 to 0.3ps rms max

Output Control

- Enable/Disable:
Logic '1' (70%Vs min) to pad 1 or no connection enables oscillator output
Logic '0' (30%Vs max) to pad 1 disables oscillator output

Environmental Parameters

- Shock: MIL-STD-883, Method 2002
- Storage Temperature Range: -55 to 125°C
- Humidity: after 48 hours at 85 °C ±2 °C 85 % relative humidity non-condensing
- Thermal Shock: MIL-STD-883, Method 1011
- Vibration: MIL-STD-883, Method 2007

Ordering Information

- *minimum information required
Frequency*
Model*
Output Type*
Pad 1 or 2 function*
Supply Voltage*
Frequency Stability*
Operating Temperature Range*

Compliance

- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Bulk Loose in bulk pack
Pack Size: 1
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 2,000

Pb-Free Reflow


Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com

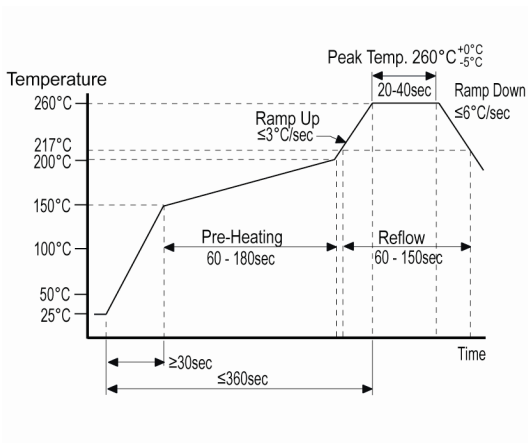

Electrical Specification - maximum limiting values

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.0MHz	640.0MHz	-40 to 85	-	-	-	-

This document was correct at the time of printing; please contact your local sales office for the latest version.
[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com